




Y2 and Y2A Series Electric Motors

(UP TO 315Kw IN STOCK FOR IMMEDIATE DELIVERY)

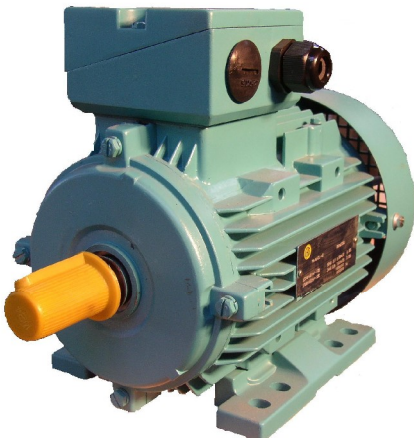

Y2A ALUMINIUM RANGE

- FRAMES 63 TO 132 (UP TO 7.5 Kw)
- MULTIPOSITION TERMINAL BOX
- SUITABLE FOR INVERTER OPERATION
- LIGHTWEIGHT ALUMINIUM CHASSIS
- THERMAL PROTECTION FITTED FROM FRAME 132 UP TO 315
- S.K.F BEARINGS
- STAINLESS STEEL NAMEPLATES
- PROTECTION RATING IP55
- ANTI-CORROSIVE PAINT
- EFF 2 STANDARD OR EFF1 ON REQUEST
- FORCED VENT KITS AVAILABLE




Y2 CAST IRON RANGE

- FRAMES 100 TO 355 (2.2Kw UP TO 315 Kw)
- SOLID CAST IRON CHASSIS
- SUITABLE FOR INVERTER OPERATION
- AVAILABLE IN DUAL SPEED
- THERMAL PROTECTION FITTED
- S.K.F BEARINGS
- 380V / 690V CONNECTION
- PROTECTION RATING IP55
- CLASS F INSULATION / B TEMP RISE
- EFF 2 AS STANDARD OR EFF1 ON REQUEST
- FORCED VENT KITS AVAILABLE
- STAINLESS STEEL NAMEPLATES



BRAKE MOTORS

- UP TO 4Kw AVAILABLE Ex STOCK
- SOLID CAST IRON CONSTRUCTION
- DC BRAKE COIL
- MANUAL RELEASE HANDLE
- S.K.F BEARINGS AS STANDARD
- P.T.C. FITTED IN FRAME 132
- FORCED VENT KITS AVAILABLE
- EFF 2 STANDARD OR EFF1 ON REQUEST
- PROTECTION RATING IP55

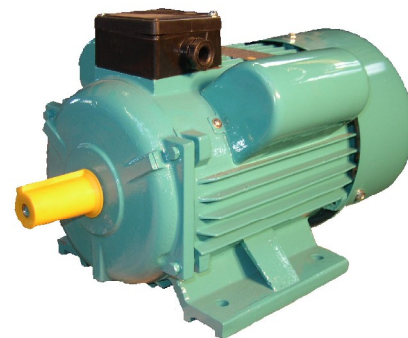

SINGLE PHASE MOTORS

- UP TO 3 Kw Ex STOCK (4HP)
- ALUMINIUM UP TO FRAME 112 (3HP)
- MULTIPOSITION TERMINAL BOX
- DETACHABLE FEET
- HIGH STARTING TORQUE
- DUAL CAPACITOR DESIGN
- S.K.F BEARINGS AS STANDARD
- PROTECTION IP55



This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.